

How to enable Hik-Connect service in device

Hik-Connect function can be enabled via SADP tool, device local GUI (for DVRs/NVRs), device web GUI, iVMS-4500 app and iVMS-4200 client software.


Note:

- 1) The Hik-Connect function is DISABLED by default in device.
- 2) For SADP, iVMS-4500 & iVMS-4200, please wait the new version which will be released to support Hik-Connect later, we will update the contents in this document accordingly.

Method 1: Enable Hik-Connect via device web browser

Steps:

- a. Login the device via web browser;
- b. Go to Configuration > Network > Platform Access and enable Hik-Connect service by placing a check in the Enable checkbox

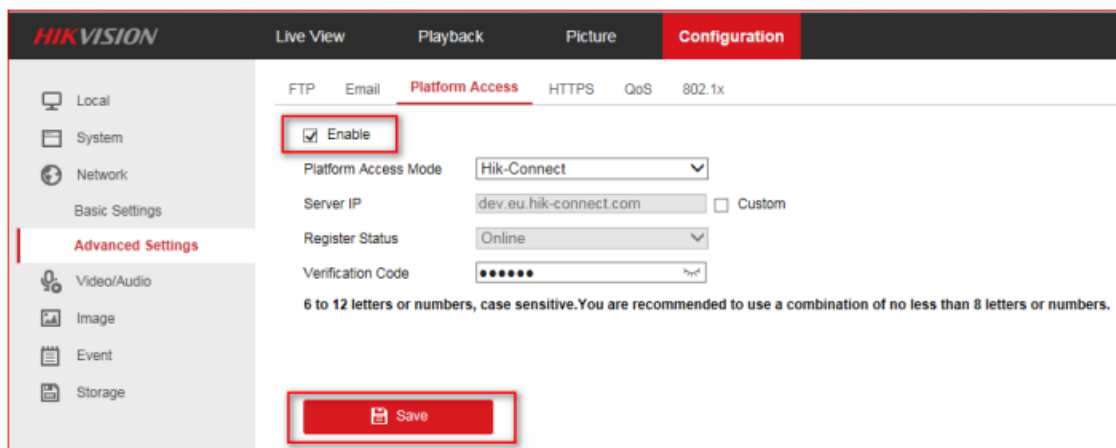

- c. For the first time to use, users need to create a verification code. i. Enter a new verification code and confirm; ii. Read the terms of service; iii. Click 'OK' to save the settings.

Note ✕

To enable Hik-Connect service, you need to create a verification code or edit the default verification code.

Verification Code

6 to 12 letters or numbers, case sensitive. You are recommended to use a combination of no less than 8 letters or numbers.

Confirm Verification Code

The Hik-Connect service will require internet access. Please read the ["Terms of Service"](#) before enabling the service.

d. Click 'Save' after all settings.

Note:

Users can check or modify the verification code in this page as well.

Method 2: Enable Hik-Connect via device local GUI (for DVRs/NVRs)

Steps:

- a. Enter the device local GUI, go to Configuration>Network>Platform Access.
- b. Enable the Hik-Connect service by placing a check in the Enable checkbox.

Setting	Value
Enable	<input checked="" type="checkbox"/>
Access Type	Hik-Connect
Server Address	dev.hik-connect.com
Enable Stream Encryption	<input type="checkbox"/>
Verification Code	LYSXPR
Status	Offline

c. For the first time to use, users need to create a verification code.

- i. Enter a new verification code;
- ii. Read the terms of service and check the check box of terms of service;
- iii. Click 'OK' to save the settings.



- d. Click 'Apply' after all settings. Note: User can check or modify the verification code in this page as well.